

SSPEX-T SERIES STAINLESS STEEL PEX TEE



SPECIFICATION:

- For use with ASTM F2769, ASTM F2023, (PE-RT) SDR9 pipe
- For use with ASTM F876 PEX pipe
- Fittings are made to ASTM F1807 standard
- Maximum Pressure Rating: 200 PSI
- Temperature Range: Up to 400°F (204°C)



CERTIFICATION:

- cUPC Listed
- NSF/ANSI 61 & 372 Certified

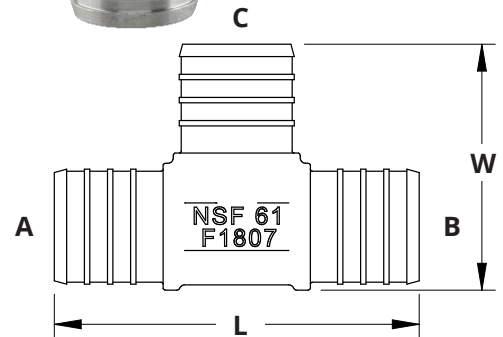

MATERIAL LIST	
Name	Percent of Composition
304 Stainless Steel	
Iron (Fe)	64.0 - 72.0
Carbon (C)	0.08 max
Silicone (Si)	1.00 max
Manganese (Mn)	2.00 max
Phosphorus (P)	0.04 max
Sulfur (S)	0.04 max
Chromium (Cr)	18.0 - 21.0
Nickel (Ni)	8.0 - 11.0

DIMENSIONS											
Part No.	Nominal Pipe Size			L		W		H		Weight	
	A	B	C	inches	mm	inches	mm	inches	mm	lbs	grams
SSPEX-T050503	1/2"	1/2"	3/8"	1.75	44.45	1.25	31.75	0.45	11.43	0.05	22.68
SSPEX-T05	1/2"	1/2"	1/2"	1.85	46.99	1.25	31.75	0.45	11.43	0.06	27.22
SSPEX-T070505	3/4"	1/2"	1/2"	2.00	50.80	1.40	35.56	0.65	16.51	0.09	40.82
SSPEX-T070507	3/4"	1/2"	3/4"	2.00	50.80	1.40	35.56	0.65	16.51	0.09	40.82
SSPEX-T070703	3/4"	3/4"	3/8"	2.00	50.80	1.40	35.56	0.65	16.51	0.09	40.82
SSPEX-T070705	3/4"	3/4"	1/2"	2.00	50.80	1.40	35.56	0.65	16.51	0.08	36.29
SSPEX-T07	3/4"	3/4"	3/4"	2.05	52.07	1.45	36.83	0.65	16.51	0.10	45.36
SSPEX-T070710	3/4"	3/4"	1"	2.25	57.15	1.75	44.45	0.95	24.13	0.17	77.11
SSPEX-T100707	1"	3/4"	3/4"	2.50	63.50	1.65	41.91	0.85	21.59	0.15	68.04
SSPEX-T101005	1"	1"	1/2"	2.60	66.04	1.65	41.91	0.85	21.59	0.14	63.50
SSPEX-T101007	1"	1"	3/4"	2.60	66.04	1.65	41.91	0.85	21.59	0.16	72.57
SSPEX-T100507	1"	1/2"	3/4"	2.50	63.50	1.65	41.91	0.85	21.59	0.16	72.57
SSPEX-T100705	1"	3/4"	1/2"	2.15	54.61	1.70	43.18	0.85	21.59	0.12	54.43
SSPEX-T100510	1"	1/2"	1"	2.50	63.50	1.85	46.99	0.90	22.86	0.14	63.50
SSPEX-T100710	1"	3/4"	1"	2.45	62.23	1.80	45.72	0.90	22.86	0.11	49.90
SSPEX-T10	1"	1"	1"	2.65	67.31	1.85	46.99	0.90	22.86	0.16	72.57



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com